

WHURL™ PENDANT

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: 9900

APPLICATION	• PENDANT MOUNT • INDOOR RATED
DIMENSION	• 30" (76CM)
ILLUMINATION	• DIFFUSE • LED 90CRI • 3,496 - 3,734 LUMENS
ELECTRICAL	• 120 - 277V (347V CONSULT FACTORY) • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES
CONSTRUCTION	• STEEL TRIM
FINISHES	• AVAILABLE IN SEVERAL TMS PLATED, AND POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 15 LBS MAXIMUM



DIFFUSE

TMSLIGHTING





WHURL™ PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____

9900 - 1 - 2 - 3 - 4 - 5 - 6 - 7


1.	30									
DIAMETER	30" DIA. (76CM)									
LED (W)	42W									
LUMENS	3734									
2.	30K			35K				40K		
LED CCT	3000K			3500K				4000K		
3.	120					277				
VOLTAGE	120V					277V				
4.	BC					WC				
CORD	BLACK DROP CORD					WHITE DROP CORD				
5.	SN	CH	BC	AC	AB	SB	PB	F04	F05	F16
FINISH	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUE COPPER	ANTIQUE BRASS	SATIN BRASS	POLISHED BRASS	MATTE WHITE	GLOSS WHITE	GLOSS BLACK
	RAL	RAL								
	PYRITE BRONZE	CUSTOM SPECIFY)								
6.	OP					SD				
DIFFUSER	OPAL - WHITE ACRYLIC					SAND - BLASTED WHITE				
7.	---					DIML				
DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)				

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING



WHURL™ PENDANT

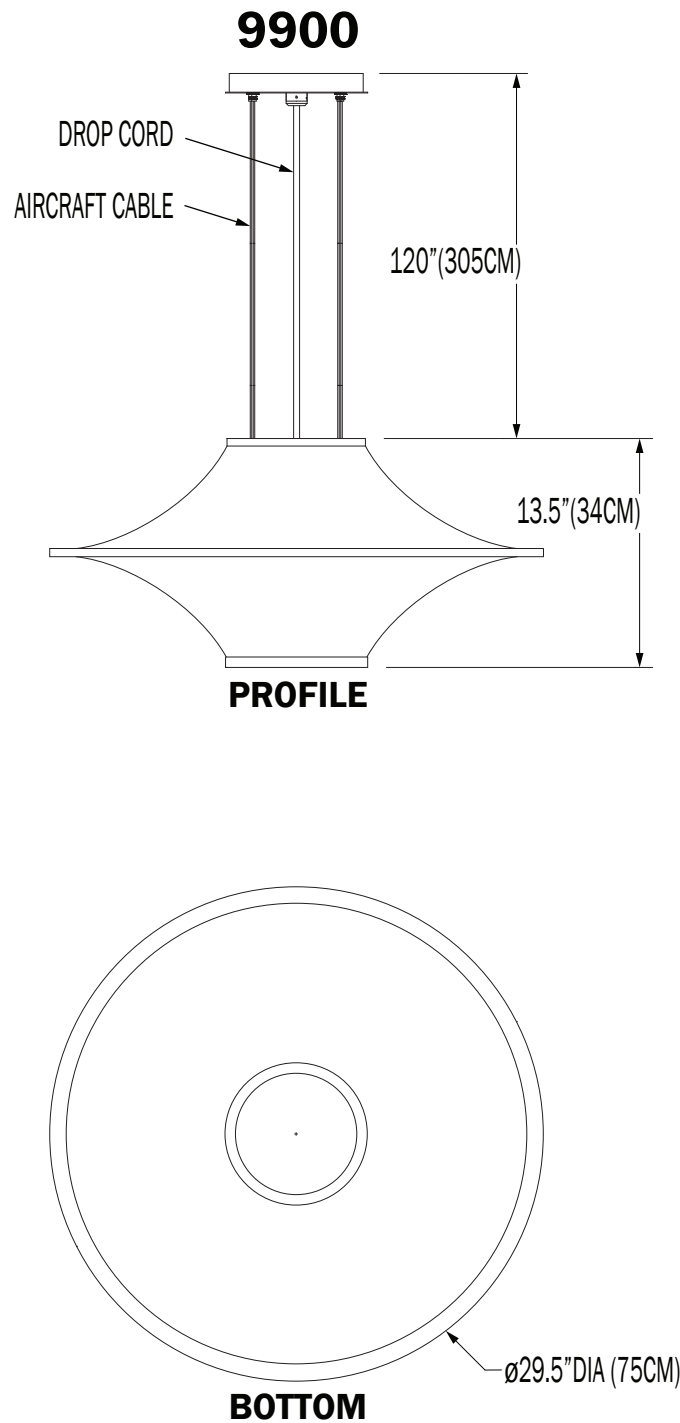

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

TMSLIGHTING


DIFFUSE

PN	DIFFUSER	FINISH	LUMENS	WATTAGE
9900	OP	F33	3496	42
		F31	3734	42

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 9900 42LED F33 OP.IES

POLAR GRAPH

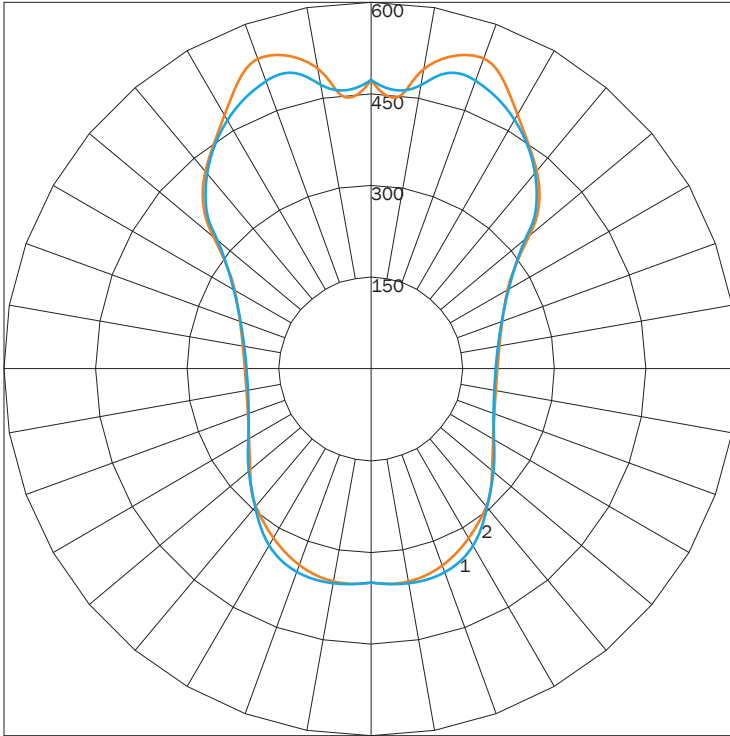

MAXIMUM CANDELA = 543.15 - LOCATED AT HORIZONTAL ANGLE = 150, VERTICAL ANGLE = 160
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

3496

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

73


TOTAL LUMINAIRE WATTS

48

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 9900 42LED F31 OP.IES

POLAR GRAPH

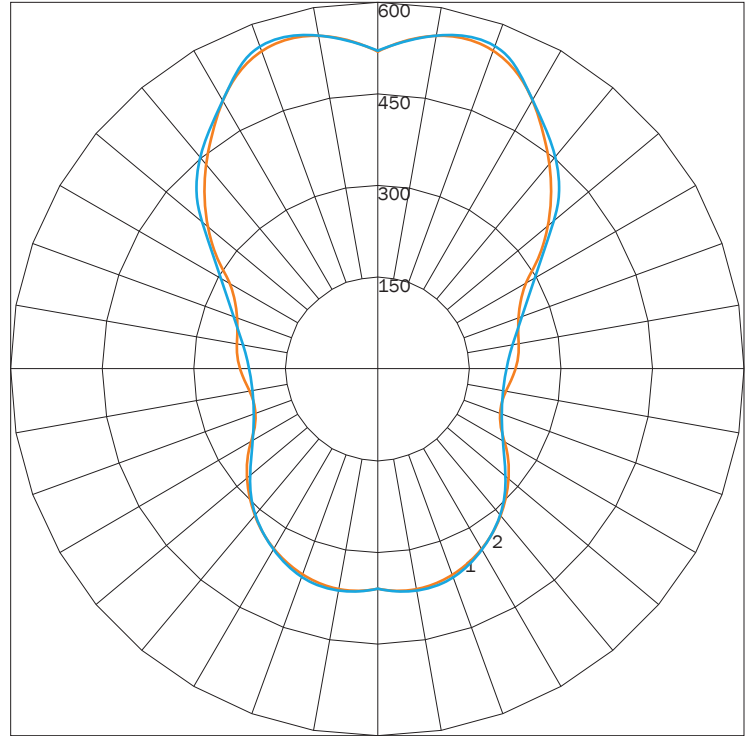

MAXIMUM CANDELA = 597.51 - LOCATED AT HORIZONTAL ANGLE = 30, VERTICAL ANGLE = 160
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

3734

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

78

TOTAL LUMINAIRE WATTS

48

AVAILABLE FINISHES



SN
SATIN
NICKEL



CH
CHROME



BC
BLACK
CHROME



AC
ANTIQUE
COPPER



AB
ANTIQUE
BRASS



SB
SATIN
BRASS



PB
ANTIQUE
BRASS



F04
MATTE
WHITE



F05
GLOSS
WHITE



F16
GLOSS
BLACK



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.