

TMSLIGHTING | 100 YEARS

QUICK SHIP




10 DAY LEAD TIME

TMSLIGHTING.COM

TMS LIGHTING INC. ESTABLISHED 1923

LINEAR PENDANT

FLUX DIRECT INDIRECT

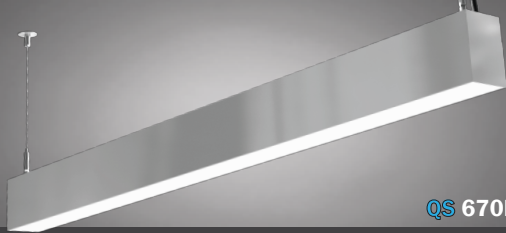

QS 670FL

LENGTH	24ID 24" (61CM) 48ID 48" (121CM) 72ID 72" (182CM)	96ID 96" (243CM) 120ID 120" (305CM) 144ID 144" (366CM)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
DIFFUSER	SW	SATIN
CIRCUITS	S D	SINGLE DUAL
MOUNTING	ACC ACT	CABLE & CORD CABLE & CORD FOR T-BAR
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

PROFILE: 2.8"W X 4.3"H
LONGER LENGTHS AND CONTINUOUS RUNS AVAILABLE - CONSULT FACTORY
SEE TMSLIGHTING.COM FOR DIRECT ILLUMINATION OPTIONS

FLIRE DIRECT INDIRECT



QS 570FL

LENGTH	24ID 24" (61CM) 48ID 48" (121CM) 72ID 72" (182CM)	96ID 96" (243CM) 120ID 120" (305CM) 144ID 144" (366CM)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
DIFFUSER	SW	SATIN
CIRCUITS	S D	SINGLE DUAL
MOUNTING	ACC ACT	CABLE & CORD CABLE & CORD FOR T-BAR
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

PROFILE: 1.84"W X 3.6"H
LONGER LENGTHS AND CONTINUOUS RUNS AVAILABLE - CONSULT FACTORY
SEE TMSLIGHTING.COM FOR DIRECT ILLUMINATION OPTIONS

FLUX CEILING



QS 680FLC

LENGTH	24D 24" (61CM) 48D 48" (121CM) 72D 72" (182CM)	96D 96" (243CM) 120D 120" (305CM) 144D 144" (366CM)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
DIFFUSER	SW	SATIN
MOUNTING	ACC ACT	CABLE & CORD CABLE & CORD FOR T-BAR
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

PROFILE: 2.8"W X 3.1"H
LONGER LENGTHS AND CONTINUOUS RUNS AVAILABLE - CONSULT FACTORY

FLIRE CEILING



QS 380FLC

LENGTH	24D 24" (61CM) 48D 48" (121CM) 72D 72" (182CM)	96D 96" (243CM) 120D 120" (305CM) 144D 144" (366CM)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
DIFFUSER	SW	SATIN
MOUNTING	ACC ACT	CABLE & CORD CABLE & CORD FOR T-BAR
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

PROFILE: 1.8"W X 3"H
LONGER LENGTHS AND CONTINUOUS RUNS AVAILABLE - CONSULT FACTORY

FORTE



QS FOR

APPLICATION	I	INDOOR
DIAMETER	12 14 16	12" DIA. (31CM) 14" DIA. (36CM) 16" DIA. (41CM)
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED (CRI 90) 17W LED (SCREW - TYPE, 60° BEAM) 19W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

CUBA



QS CUB

APPLICATION	I	INDOOR
DIAMETER	9 10 12	9" DIA. (23CM) 10" DIA. (25CM) 12" DIA. (31CM)
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED (CRI 90) 17W LED (SCREW - TYPE, 60° BEAM) 19W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

RADIAL



QS RAD

APPLICATION	I	INDOOR
DIAMETER	16 19	16" DIA. (41CM) 19" DIA. (48CM)
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED (CRI 90) 17W LED (SCREW - TYPE, 60° BEAM) 19W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

MARTINI



QS MAR

APPLICATION	I	INDOOR
DIAMETER	8 10 12 14	8" DIA. (20CM) 10" DIA. (25CM) 12" DIA. (31CM) 14" DIA. (36CM)
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED (CRI 90) 17W LED (SCREW - TYPE, 60° BEAM) 19W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

PENDANTS

PENDANTS

PENDANTS

PENDANTS

DISCO



QS 350DI

DIAMETER	18 24	18" DIA. (41CM) 24" DIA. (48CM)
ILLUMINATION	20LED 30LED	20W LED (CRI 90) 30W LED (CRI 90)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
ACCENT FINISH (INTERIOR)	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

SECONDARY "ACCENT" FINISH AS INTERIOR

CHAPPY



QS 499CH

DIAMETER	6 8	6" DIA. (15CM) 8" DIA. (20CM)
ILLUMINATION	20INC 9LED	20W INC MED BASE (PAR 20 RECOMMENDED) 9W LED (CRI 90)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
ACCENT FINISH (INTERIOR)	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

SECONDARY "ACCENT" FINISH AS INTERIOR

ROLLY



QS 779RO

DIAMETER	6 8	6" DIA. (15CM) 8" DIA. (20CM)
ILLUMINATION	20INC 9LED	20W INC MED BASE (PAR 20 RECOMMENDED) 9W LED (CRI 90)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
ACCENT FINISH (INTERIOR)	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

INTERIOR AS SECONDARY "ACCENT" FINISH

BELLATRIX



QS 343BX

DIAMETER	10 15 20	10" DIA. (25CM) 15" DIA. (38CM) 20" DIA. (41CM)
ILLUMINATION	20LED 30LED 100IN	20W LED (CRI 90) 30W LED (CRI 90) 100W INC MAX.
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
ACCENT FINISH (INTERIOR)	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

INTERIOR AS SECONDARY "ACCENT" FINISH

BELLINI



QS BEL

ILLUMINATION	15LED 19LED	15W LED (CRI 90) 19W LED (CRI 90)
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

DIMENSION: 13"H X 10"DIA.

BROOKE



QS BRO

APPLICATION	I	INDOOR
DIAMETER	16 18	16" DIA. (41CM) 18" DIA. (46CM)
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED (CRI 90) 17W LED (SCREW - TYPE, 60° BEAM) 19W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE. SEE TMSLIGHTING.COM

TRISHA



QS TRI

APPLICATION	I	INDOOR
DIAMETER	9 10 12	9" DIA. (23CM) 10" DIA. (25CM) 12" DIA. (31CM)
ILLUMINATION	15LED 17LED 19LED 32LED 100IN	15W LED (CRI 90) 17W LED (SCREW - TYPE, 60° BEAM) 19W LED (CRI 90) 32W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE. SEE TMSLIGHTING.COM

HAILEY



QS HAI

APPLICATION	I	INDOOR
DIAMETER	9 10 12	9" DIA. (23CM) 10" DIA. (25CM) 12" DIA. (31CM)
ILLUMINATION	15LED 19LED 32LED 100IN	15W LED (CRI 90) 9" & 10" DIA. ONLY 19W LED (CRI 90) 12", 15", 18" & 20" DIA. ONLY 32W LED (CRI 90) 18" & 20" DIA. ONLY 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE. SEE TMSLIGHTING.COM

PENDANTS

PENDANTS

PENDANTS

MAXXIMUS



QS MAX

APPLICATION	I	INDOOR
ILLUMINATION	15LED 60IN	15W LED (CRI 90) 60W INC MAX.
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
GLOBE/LENS	G11	CLEAR, ELONGATED GLOBE W/ CAST GUARD
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

DIMENSION: 11" DIA. X 10"H

OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

JAZZ



QS JAZ

APPLICATION	I	INDOOR
DIAMETER	14 14" DIA. (35CM) 20 20" DIA. (51CM)	
ILLUMINATION	15LED 19LED 100IN	15W LED (CRI 90) 14"-18" DIA. ONLY 19W LED (CRI 90) 20"-24" DIA. ONLY 100W INC MAX.
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

CALVIN



QS CAL

APPLICATION	I	INDOOR
DIAMETER	12 12" DIA. (31CM) 20 20" DIA. (51CM) 14 14" DIA. (36CM) 22 22" DIA. (56CM) 16 16" DIA. (41CM) 24 24" DIA. (61CM) 18 18" DIA. (46CM)	
ILLUMINATION	15LED 17LED 19LED 32LED 100IN	15W LED (CRI 90) 17W LED (SCREW - TYPE, 60° BEAM) 19W LED (CRI 90) 32W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER (OPTIONAL)	CD RM	CANOPY MOUNT REMOTE MOUNT
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

NAUTIC



QS NAU

APPLICATION	I	INDOOR
DIAMETER	14 14" DIA. (35CM) 16 16" DIA. (41CM)	
ILLUMINATION	15LED 100IN	15W LED (CRI 90) 14"-18" DIA. ONLY 100W INC MAX.
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
GLOBE/LENS	G1	CLEAR, ELONGATED GLOBE
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

BELLA




QS 333BE

DIAMETER	10 14 18	10" DIA. (25CM) 14" DIA. (35CM) 18" DIA. (46CM)
ILLUMINATION	20LED 30LED 60IN	20W LED (CRI 90) 30W LED (CRI 90) 60W INC MAX.
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277 UNI	120V 277V UNI (120-277V)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS

JOOPI

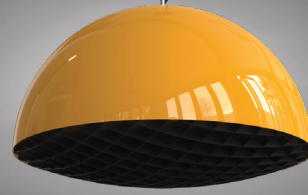

QS J00

DIAMETER	14 18 24	14" DIA. (35CM) 18" DIA. (46CM) 24" DIA. (61CM)	36 40	36" DIA. (91CM) 40" DIA. (102CM)
ILLUMINATION	19LED 32LED 100IN	19W LED (CRI 90) 32W LED (CRI 90) 100W INC MAX.		
MOUNTING	CRD	120" DROP CORD (INDOOR)		
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD		
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K		
VOLTAGE	120 277	120V 277V		
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES		
ACCENT FINISH (INTERIOR)	F##	SEE PAGE 15 FOR AVAILABLE FINISHES		
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)		
MOUNTING ACCESORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS		

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
INTERIOR AS SECONDARY "ACCENT" FINISH

SIYA



QS 502SICL

DIAMETER	12 24 36	12" DIA. (35CM) 24" DIA. (46CM) 36" DIA. (61CM)
ILLUMINATION	15LED 20LED 30LED 100IN	15W LED (CRI 90) 20W LED (CRI 90) 30W LED (CRI 90) 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
ACCENT FINISH (INTERIOR)	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
INTERIOR AS SECONDARY "ACCENT" FINISH

DISCO



QS 502SICL

ILLUMINATION	20LED 30LED	20W LED (CRI 90) 30W LED (CRI 90)
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
ACCENT FINISH (INTERIOR)	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

DIMENSION: 24" DIA. X 5.5"H
INTERIOR AS SECONDARY "ACCENT" FINISH

PENDANTS

CEILING

CYLINDERS

UP-DOWN PENDANT CYLINDER



QS CYP U

DIAMETER	6 8	6" DIA. (15CM) 8" DIA. (20CM)
ILLUMINATION	15LED2 19LED2 100IN2 60IN2	2 X 15W LED (CRI 90) 2 X 19W LED (CRI 90) 2 X 100W INC MAX 2 X 60W INC
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT SINKING)

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
DIMENSION: 24" H (BOTH SIZES)

PENDANT CYLINDER



QS CYP

APPLICATION	I	INDOOR
DIAMETER	6 8	6" DIA. (15CM) 8" DIA. (20CM)
ILLUMINATION	15LED 19LED 32LED 100IN	15W LED (CRI 90) 19W LED (CRI 90) 32W LED (CRI 90) 100W INC MAX
MOUNTING	CRD	120" DROP CORD (INDOOR)
CORD	BC WC	BLACK DROP CORD WHITE DROP CORD
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT - SINKING)
MOUNTING ACCESSORIES	ACC	AIRCRAFT CABLE FOR DROP CORDS

DIMENSION: 15" H X 6" DIA. (CYP 6) / 18" H X 8" DIA. (CYP 8)
OUTDOOR & STEM MOUNTING OPTIONS AVAILABLE. SEE TMSLIGHTING.COM

UP-DOWN CYLINDER



QS CYU

APPLICATION	O	OUTDOOR
DIAMETER	6 8	6" DIA. (15CM) 8" DIA. (20CM)
ILLUMINATION	15LED2 19LED2 100IN2 60IN2	2 X 15W LED (CRI 90) 2 X 19W LED (CRI 90) 2 X 100W INC MAX 2 X 60W INC
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT - SINKING)

SEE TMSLIGHTING.COM FOR COMPATIBILITY RESTRICTIONS
DIMENSION: 24" H (BOTH SIZES)
INDOOR OPTIONS AVAILABLE. SEE TMSLIGHTING.COM

CEILING CYLINDER



QS CYC

APPLICATION	O	OUTDOOR
DIAMETER	6 8	6" DIA. (15CM) 8" DIA. (20CM)
ILLUMINATION	15LED 19LED 100IN 60IN	15W LED (CRI 90) 19W LED (CRI 90) 100W INC MAX 60W INC
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0-10V, CURRENT - SINKING)

DIMENSION: 15" H X 6" DIA. (CYC 6) / 18" H X 8" DIA. (CYC 8)
INDOOR OPTIONS AVAILABLE. SEE TMSLIGHTING.COM

SIGN 1



QS 1

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60° BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
WIRE GUARD (OPTIONAL)	W8	8" WIRE GUARD
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 16"H X 27"L REFLECTOR 8"DIA.
INCANDESCENT OPTION SHOWN

SIGN 5




QS 5

ILLUMINATION	15LED 100IN	15W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
WIRE GUARD (OPTIONAL)	W8	8" WIRE GUARD
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 16"H X 27"L REFLECTOR 8"DIA.
INCANDESCENT OPTION SHOWN

SIGN 6

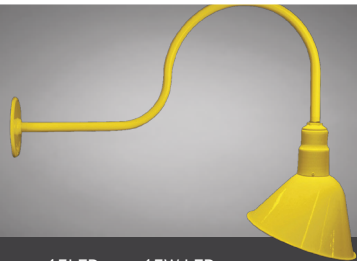

QS 6

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60° BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
WIRE GUARD (OPTIONAL)	W10	10" WIRE GUARD

DIMENSION: 24"H X 34"L REFLECTOR 10"DIA.
INCANDESCENT OPTION SHOWN

SIGN 7



QS 7

ILLUMINATION	15LED 100IN	15W LED (4000K, CRI 90) 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 18"H X 23"L REFLECTOR 9"DIA.
INCANDESCENT OPTION SHOWN

SIGN LIGHTS

SIGN LIGHTS

SIGN LIGHTS

SIGN 9



QS 9

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60" BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
WIRE GUARD (OPTIONAL)	W10	10" WIRE GUARD

MOUNTING ARM IS F18 SATIN ALUMINUM
 DIMENSION: 10"H X 17"L REFLECTOR 10"DIA.
 INCANDESCENT OPTION SHOWN

SIGN 19



QS 19

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60" BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 25"H X 29"L REFLECTOR 12"DIA.
 INCANDESCENT OPTION SHOWN

SIGN 24




QS 24

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60" BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

MOUNTING ARM IS F18 SATIN ALUMINUM
 DIMENSION: 9"H X 17"L REFLECTOR 10"DIA.
 INCANDESCENT OPTION SHOWN


SIGN 25

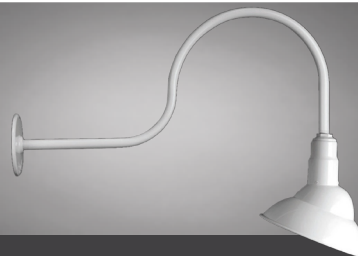

QS 25

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60" BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 26"H X 35"L REFLECTOR 10"DIA.
 INCANDESCENT OPTION SHOWN

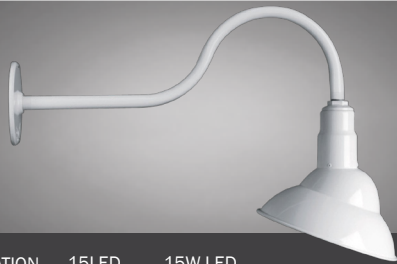SIGN 26

QS 26

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60° BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 16"H X 27"L REFLECTOR 10"DIA.
INCANDESCENT OPTION SHOWN

SIGN 28

QS 28

ILLUMINATION	15LED 100IN	15W LED (4000K, CRI 90) 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 18"H X 14"L REFLECTOR 8"DIA.
INCANDESCENT OPTION SHOWN

SIGN 30

QS 30

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60° BEAM, 4000°K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 25"H X 38"L REFLECTOR 90"DIA.
INCANDESCENT OPTION SHOWN

SIGN 32

QS 32

ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60° BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)
ACCESSORIES (OPTIONAL)	AK	AIMING KNUCKLE

DIMENSION: 24"H X 27"L REFLECTOR 10"DIA.
INCANDESCENT OPTION SHOWN

SIGN LIGHTS

SIGN LIGHTS

MAXXIMUS



QS MXW11

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 60IN	15W LED (CRI 90) 60W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 18"H X 15"H REFLECTOR 11"DIA.

LED OPTION SHOWN

INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

PRIMUS



QS PRW14

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 60IN	15W LED (CRI 90) 60W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 15"H X 17"L REFLECTOR 14"DIA.

LED OPTION SHOWN

INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

FARM LIGHT



QS 10W

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 100IN	15W LED (CRI 90) 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 6"H X 20"L REFLECTOR 12"DIA.

MOUNTING ARM IS F18 SATIN ALUMINUM

INCANDESCENT OPTION SHOWN

INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

JAZZ



QS 33W

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 150IN	15W LED (CRI 90) 150W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 13"H X 31"L REFLECTOR 16"DIA.

INCANDESCENT OPTION SHOWN

INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

CHINA



QS CHW16

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 150IN	15W LED (CRI 90) 150W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 24"H X 25"L REFLECTOR 16"DIA.
INCANDESCENT OPTION SHOWN
INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

NAUTIC



QS 3W

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 150IN	15W LED (CRI 90) 150W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 22"H X 37"L REFLECTOR 16"DIA.
INCANDESCENT OPTION SHOWN
INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

FORTE



QS 4W

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60° BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 18"H X 33"L REFLECTOR 16"DIA.
INCANDESCENT OPTION SHOWN
INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

CALVIN



QS 2W

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60° BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 15"H X 31"L REFLECTOR 16"DIA.
INCANDESCENT OPTION SHOWN
INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

ARCHITECTURAL

WALL-MOUNTED

HAILEY



QS HYW10

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 100IN	15W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 18"H X 16"L REFLECTOR 10"DIA.

LED OPTION SHOWN

INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

MELLO



QS MEW10

APPLICATION	O	OUTDOOR
ILLUMINATION	15LED 100IN	15W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 18"H X 16"L REFLECTOR 10"DIA.

LED OPTION SHOWN

INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

RADIAL



QS 8W

APPLICATION	I	INDOOR
ILLUMINATION	15LED 17LED 19LED 100IN	15W LED 17W LED (SCREW - TYPE 60" BEAM, 4000K) 19W LED 100W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
DRIVER	WM	WALL MOUNT (INTEGRAL)
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
DIMMING (OPTIONAL)	DIML	LED DIMMING (0 - 10V, CURRENT - SINKING)

DIMENSION: 20"H X 40"L REFLECTOR 19"DIA.

INCANDESCENT OPTION SHOWN

INDOOR OPTIONS AVAILABLE, SEE TMSLIGHTING.COM

SEAWIND



QS SWW1

ILLUMINATION	15LED 60IN	15W LED 60W INC MAX
LED CCT (COLOR TEMP.)	30K 35K 40K	3000K 3500K 4000K
VOLTAGE	120 277	120V 277V
FINISH	F##	SEE PAGE 15 FOR AVAILABLE FINISHES
GLOBE/LENS (OPTIONAL)	G1 G2	CLEAR, ELONGATED GLOBE FROSTED GLOBE

DIMENSION: 9.9"H X 14.125"D

LED OPTION SHOWN

TMS FINISHES

FINISHES

FINISHES



* APPLIED ON THE INSIDE AND OUTSIDE OF RLM REFLECTORS. OTHERWISE, THE OUTER SURFACE WILL BE COLORED USING THE SPECIFIED FINISH AND THE INNER SURFACE WILL BE COATED WITH WHITE (F05). FOR ALTERNATE PLATED FINISHES AND DIFFUSERS, CONTACT TMS LIGHTING FOR ASSISTANCE.

** RAL AVAILABLE UPON REQUEST. LONGER LEAD TIMES APPLY.



TMSLIGHTING100YEARS

TMSLIGHTING.COM

1-866-793-1174

TMS LIGHTING INC. ESTABLISHED 1923